

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 April 2005 (14.04.2005)


PCT

(10) International Publication Number
WO 2005/034444 A1

- (51) International Patent Classification⁷: **H04L 12/56** (74) Agent: **HITCHING, Peter, Matthew**; Haseltine Lake, Imperial House, 15-19 Kingsway, London WC2B 6UD (GB).
- (21) International Application Number: **PCT/GB2004/004209**
- (22) International Filing Date: **1 October 2004 (01.10.2004)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data: **0323246.9** **3 October 2003 (03.10.2003)** **GB**
- (71) Applicant (for all designated States except US): **FUJITSU LIMITED [JP/JP]**; 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588 (JP).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **ABEDI, Saled [IR/GB]**; 9 The Pinnacle, Kings Road, Reading, Berkshire RG1 4LS (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.**
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): **ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**

[Continued on next page]

(54) Title: **VIRTUALLY CENTRALIZED UPLINK SCHEDULING**

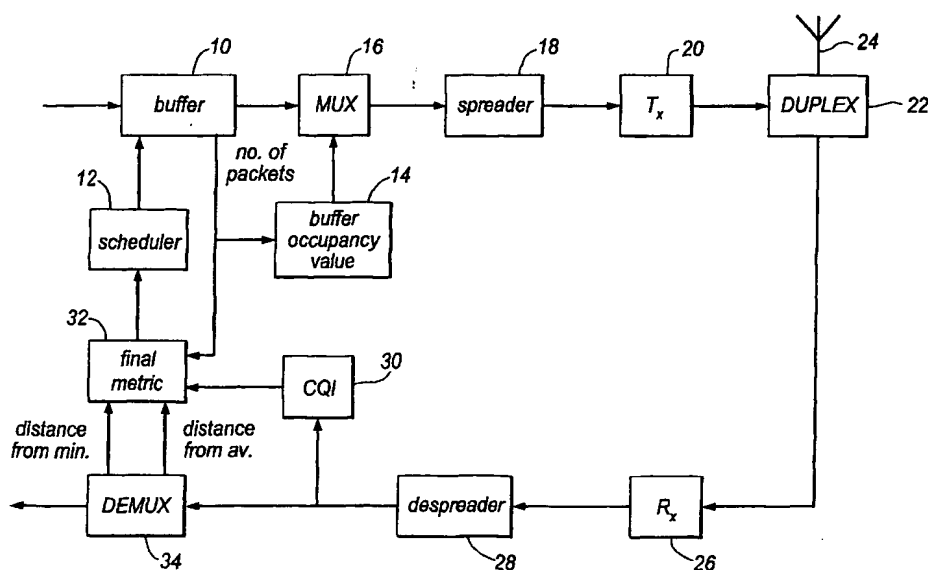

(57) Abstract: A method of scheduling uplink transmissions from a plurality of source user equipments to a base station is disclosed. The method comprises the steps of determining the amount of data in the data buffer of each of the user equipments, comparing the amount of data in the data buffers of the user equipments to obtain, for each user equipment, a relative indicator, the relative indicator indicating how full that user equipment's data buffer is in comparison to the data buffers of the other user equipments, and scheduling uplink transmissions in dependence on the relative indicators. In this way, each user equipment is given some knowledge of the state of the buffer in the other user equipments. The user equipments are therefore able to make more efficient scheduling decisions. This can improve the throughput and give lower packet delivery delays.



Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

VIRTUALLY CENTRALIZED UPLINK SCHEDULING

The present invention relates to techniques for scheduling of uplink transmissions in wireless communications systems. The present invention is particularly, but not exclusively, applicable to code division multiple access (CDMA) communications systems such as 3G communication systems.

Figure 1 shows parts of a wireless communications system, in which a plurality of source user equipments UE1, UE2, UE3 are in communication with a plurality of destination user equipments UE4, UE5, UE6 via a base station BS. Source UEs UE1, UE2, UE3 transmit data packets in an uplink to the base station BS. Base station BS receives the data packets from the source UEs and buffers these data packets for onward transmission in a downlink to the destination UEs. In this example, each wireless channel is allocated a separate channelisation code in order to distinguish that channel from the other channels (CDMA).

In the system of Figure 1 it is necessary to provide some mechanism for determining when and how each of the source UEs transmits its data in the uplink to the base station. In the simplest case, each source UE transmits whenever it has data to send. This technique may work well when there are low offered loads on the uplink. However, if too many UEs try to transmit data at the same time, the interference levels may become unacceptable, resulting in poor quality of service.

Various techniques are known for scheduling of uplink transmissions. The aim of these scheduling techniques is to manage the way in which the UEs transmit to the

base station in order to meet certain criteria, such as interfere levels, fairness or throughput.

In one scheduling technique, known as time scheduling,
5 a single UE is given the full uplink resources for a given period of time. Some mechanism is implemented for determining which UE has the channel resources at any one time. For example, each UE may take it in turns to transmit its data, or else the UE which is
10 given the channel resources may be selected by taking into account the channel quality.

In time scheduling, only one UE transmits at any one time, and so each UE can transmit within its time
15 window at a high data rate, without causing interference to other UEs. However, time scheduling is inefficient in terms of throughput in the uplink due to the delays involved in informing each UE when it can transmit. Other disadvantages of time scheduling
20 include loss of interference diversity (which increases the interference caused to adjacent cells), less accurate power control, due to less frequent power control signals, and wasted uplink capacity when a UE has little to transmit.

25 In another scheduling technique, known as rate scheduling, each UE decides on the rate at which it transmits data based on information which is signalled to it by the network. For example, in 3G
30 communications systems (W-CDMA), each UE may decide its rate based on information from the Transport Format Combination Set (TFCS) signalled to it by the radio network controller (RNC). This rate is usually less
35 than the UE's maximum rate, and is set to ensure that interference remains within acceptable levels.

An advantage of rate scheduling is that, since many UEs are transmitting, interference diversity is maintained, which reduces interference to neighbouring cells. Rate scheduling also provides the advantage that call admission and power control mechanisms are more accurate than for time scheduling. However, rate scheduling suffers from the disadvantage that the UEs will each interfere with each other, since many UEs may be transmitting simultaneously.

10

In the downlink, it is the base station which is responsible for scheduling the packets which are to be transmitted to the various destination UEs. The scheduling functions for the downlink are therefore centralized in the base station. The base station is able to make the appropriate scheduling decisions because it is solely responsible for transmitting to the destination UEs. For example, the base station is aware of the amount of data in the buffers allocated for each destination UE, and thus can make scheduling decisions based on this knowledge. However, in the uplink the scheduling functions are decentralized, that is, they are distributed amongst the source UEs. The source UEs are not aware of the amount of data in the buffers of the other source UEs. As a consequence, it is not possible for the source UEs to make scheduling decisions based on the amount of data which the other UEs have to transmit.

For example, in a situation where only one UE has a significant amount of data to transmit (i.e. the other UEs have little data, or there are few active UEs actually present), the UE with a large amount of data still cannot choose to transmit at a high data rate, because it is not aware of the status of the other UEs. In this situation, the UE with a large amount of data

will experience unnecessary delays, because it could in fact have transmitted at a higher data rate. On the other, hand when the base station is dealing with many UEs at any one time, a UE which is not aware of the
5 situation might choose a very high data rate. This may lead to a high level of interference for the entire uplink, and thus a reduction in the quality of service for all UEs.

10 In order to prevent the necessary delays that might occur when there are UEs present with only small amounts of data to transmit, it has been proposed, in the context of 3G mobile communications system, to set a buffer threshold for each UE. This threshold is
15 defined as minimum buffer requirement before access to channel can be granted. Thus, a given UE will not transmit until the number of packets in its buffer reaches the threshold. This proposal aims to avoid under utilization of radio resources in uplink rate
20 scheduling. However, it has been realised pursuant to the present invention that such a threshold may not on its own be enough to achieve good utilization of channel resources. For example, in a situation in which one UE is just below the assigned threshold and
25 the other UEs are also all below this threshold, the first UE will not still not transmit for a while and will experience an unnecessary delay. Avoiding such delays is highly desirable for UEs with real-time continuous streaming services such as voice or video.

30 According to a first aspect of the present invention there is provided a method of scheduling uplink transmissions from a plurality of source user equipments to a base station, the method comprising the
35 steps of:

determining the amount of data in the data buffer of each of the user equipments;

comparing the amount of data in the data buffers of the user equipments to obtain, for each user
5 equipment, a relative indicator, the relative indicator indicating how full that user equipment's data buffer is in comparison to the data buffers of the other user equipments; and

scheduling uplink transmissions in dependence on
10 the relative indicators.

The present invention provides the advantage that uplink scheduling decisions can be made using knowledge of the relative amounts of data in the buffers of the
15 user equipments. This may allow better use to be made of the available resources, which may result in better throughput, lower packet delays, and better quality of service.

20 For each user equipment, either a single relative indicator or a plurality of relative indicators may be determined. By using a plurality of relative indicators, each user equipment may have a better idea of its overall status in comparison to other user
25 equipments. Where a single relative indicator is determined for each user equipment, this may be one of an indication of how full the user equipment's buffer is in comparison to the average, and an indication of how full the user equipment's buffer is in comparison
30 to the minimum. Otherwise, both an indication of how full the user equipment's buffer is in comparison to the average, and an indication of how full a user equipment's buffer is in comparison to the minimum may be determined.

35

The base station is in communication with all of the user equipments, and therefore may be in the best position to compare the amount of data in the data buffers of the user equipments. Therefore the
5 comparing step may be carried out by the base station, although it could be carried out elsewhere, such as at a radio network controller (RNC), or at user equipments themselves, if appropriate.

10 The method may comprise the step of transmitting the or each relative indicator for each user equipment from the base station to that user equipment. In this way, each user equipment is given some knowledge of the state of the buffer in the other user equipments, which
15 it can use to make scheduling decisions. Alternatively, the base station may determine, based on the or each relative indicator, a transmission format to be used by a user equipment in scheduling uplink transmissions from the user equipment to the base
20 station. The base station may then transmit to the user equipment an indication of the transmission format to be used by the user equipment. For example, the base station may transmit a rate and/or time (e.g. waiting time) of packet transmission to the user
25 equipment.

In order for the base station to compare the amount of data in the data buffers of the user equipments, it must have available the actual amount of data in each
30 data buffer. In order to achieve this, in one embodiment, a user equipment determines an amount of data in its data buffer and transmits an indication of the amount of data to the base station. If all of the user equipments transmit the amount of data in their
35 data buffers in this way, the base station is then in a position to determine the relative indicators.

In order for the uplink scheduling to be effective, the relative indicators are preferably updated on a regular basis. However, it may in some circumstances be
5 undesirable for the user equipments to be transmitting indications of the amount of data in their data buffers on a regular basis. For example, if many user equipments are present, or a large amount of data needs to be transmitted in the uplink, the extra
10 transmissions involved in the reporting process may increase the amount of interference or congestion to an unacceptable level. Thus, in a second embodiment, a user equipment sends to the base station an indication of the total amount of data to be sent, and the base
15 station determines the amount of data in the user equipment's data buffer based on the indication of the total amount of data, and the amount of data already received by the base station from that user equipment. This can reduce the number of transmissions involved in
20 the reporting process in the uplink.

Each user equipment may determine a rate and/or time at which it transmits data to the base station based on the or each relative indicator for that user equipment.
25 For example, a user equipment which receives an relative indicator indicating that it has a relatively full buffer may transmit data to the base station at a higher rate than would otherwise be the case (all other things being equal). On the other hand, a user
30 equipment which receives a relative indicator indicating that it has a relatively empty buffer may transmit data to the base station at a lower rate than would otherwise be the case. In this way, the amount of data in the data buffers of the user equipments can
35 brought into approximate equilibrium, so that all of the data buffers have approximately the same occupancy.

This increases the fairness of the system, and may also improve the overall throughput.

The user equipment may determine the time and/or rate
5 at which it transmits data based additionally on a
measurement of radio channel conditions, such a signal
to noise and interference ratio (SNIR). This can allow
the user equipment to take advantage of good radio
conditions, where they exist, by transmitting at a
10 higher rate than would otherwise be the case. On the
other hand, a user equipment with poor radio conditions
may decide not to increase its transmission rate when
it might otherwise have done so, since it would see
little benefit from doing so. The user equipment may
15 determine the measure of radio channel conditions
itself, or it may receive it from the base station or
the network or elsewhere.

The user equipment may determine the time and/or rate
20 of packet transmission based additionally on the actual
amount of data in its data buffer, rather than just the
relative indicators. This can allow the scheduling to
be based partially on the absolute amount of data in
its buffer, which may lead to better decisions. For
25 example, the amount of data in the buffer may be
compared to a threshold, such as a minimum buffer
threshold.

The user equipment may determine the time and/or rate
30 of packet transmission based additionally on the type
of service. In general, user equipments transmitting
services with a higher priority or which are more time
critical may be allowed to more often or at a greater
rate than services with a lower priority or which are
35 less time critical. For example, video services may be
given greater priority than web pages.

- Each user equipment may be assigned a minimum buffer threshold. In general, if the amount of data in the data buffer is below the threshold, then the user
5 equipment will not transmit. However, this condition may be overridden where the user equipment receives a relative indicator indicating that it has more data to transmit than other user equipments. Therefore a user equipment which receives a relative indicator
10 indicating that it has more data to transmit than other user equipments may transmit data to the base station even if the amount of data in its data buffer is below a minimum buffer threshold.
- 15 The uplink transmissions may be scheduled using rate scheduling, or they may be scheduled using hybrid rate-time scheduling. Hybrid rate-time scheduling may be preferred in some circumstances because of the greater flexibility which it offers. For example, it can allow
20 a poorly performing user equipment to recover quickly by allowing it to transmit on its own or with few other user equipments for a certain period of time. However, in other circumstances hybrid rate-time scheduling may not be appropriate; for example the delays which may
25 result in some channels may not be tolerated by the power control mechanism. Therefore the method may also include a step of switching from one to the other of rate scheduling and hybrid rate-time scheduling. The decision to switch from one to the other may be based
30 on some measure of a system parameter, such as a measure of whether power control is being performed within acceptable parameters, or whether interference diversity is within acceptable levels.
- 35 In one example, the rate of uplink transmission is varied by adjusting the modulation and coding scheme

- level. In other example the rate of uplink transmission is varied by adjusting the intervals at which the uplink transmissions take place. A user equipment may also increase its rate of uplink
- 5 transmissions by adapting its spreading code, or by occupying two or more channels. Any other appropriate technique for varying the rate of uplink transmission could be used as well or instead of these techniques.
- 10 According to a second aspect of the invention there is provided a base station for receiving data transmissions from a plurality of user equipments, the base station comprising:
- means for determining the amount of data in a data
- 15 buffer of each of the user equipments;
- means for comparing the amount of data in the data buffers of the user equipments to obtain, for each user equipment, a relative indicator, the relative indicator indicating how full that user equipment's data buffer
- 20 is in comparison to the data buffers of the other user equipments; and
- means for transmitting the relative indicator for each user equipment from the base station to that user equipment.
- 25
- The determining means may be arranged to determine, for each user equipment, an indication of how full that user equipment's buffer is in comparison to the average. Alternatively or in addition, the determining
- 30 means may be arranged to determine, for each user equipment, an indication of how full that user equipment's buffer is in comparison to the minimum. The base station may comprise means for receiving from a user equipment an indication of the amount of data

that that user equipment has in its data buffer. The base station may further comprise means for receiving from a user equipment an indication of a total amount of data to be sent by that user equipment, and means
5 for determining the amount of data in the user equipment's data buffer based on the indication of the total amount of data, and the amount of data already received by the base station from that user equipment.

10 According to a third aspect of the present invention there is provided a user equipment comprising:

a data buffer;

means for determining the amount of data in the data buffer;

15 means for transmitting an indication of the amount of data in the data buffer to a base station;

means for receiving from the base station a relative indicator, the relative indicator indicating how full the data buffer is in comparison to the data
20 buffers of other user equipments; and

means for scheduling uplink transmissions to the base station in dependence on the relative indicator.

According to a fourth aspect of the present invention
25 there is provided a user equipment comprising:

a data buffer;

means for determining an amount of data to be transmitted in a call;

means for transmitting, to a base station, an
30 indication of the amount of data to be transmitted in the call;

means for transmitting data from the data buffer to the base station;

means for receiving from the base station a relative indicator, the relative indicator indicating how full the data buffer is in comparison to the data buffers of other user equipments; and

- 5 means for scheduling uplink transmissions to the base station in dependence on the relative indicator.

In either the third or fourth aspect, the scheduling means may determine a rate and/or time at which data is
10 to be transmitted to the base station based on the relative indicator. The scheduling means may be arranged such that data is transmitted to the base station at a higher rate than would otherwise be the case when the user equipment receives a relative
15 indicator indicating that it has a relatively full buffer. The scheduling means may also or alternatively be arranged such that data is transmitted to the base station at a lower rate than would otherwise be the case when the user equipment receives a relative
20 indicator indicating that it has a relatively empty buffer. The scheduling means may be arranged to determine the time and/or rate at which data is transmitted based additionally on a measurement of radio channel conditions. The scheduling means may be
25 arranged to determine the time and/or rate of data transmission based additionally on the type of service. The scheduling means may be arranged to determine the time and/or rate of data transmission based additionally on the or a amount of data which is
30 determined to be in its data buffer.

The data buffer in the user equipment may be assigned a minimum buffer threshold. In general, if the amount of data in the data buffer is below the threshold, then
35 the user equipment will not transmit. However, this

condition may be overridden where the user equipment receives a relative indicator indicating that it has a relatively large amount of data to transmit. The scheduling means may be arranged such that data is
5 transmitted even when the amount of data in the data buffer is below a minimum buffer threshold, when the user equipment receives a relative indicator indicating that it has more data to transmit than other user equipments.

10 In another aspect of the invention there is provided a base station which receives data transmissions from a plurality of user equipments, the base station comprising:

15 a calculation unit which compares the amount of data in the data buffers of the user equipments to obtain, for each user equipment, a relative indicator, the relative indicator indicating how full that user equipment's data buffer is in comparison to the data
20 buffers of the other user equipments; and

a transmitter which transmits the relative indicator for each user equipment from the base station to that user equipment.

25 The base station may comprise a receiver which receives from a user equipment an indication of the amount of data that that user equipment has in its data buffer. Otherwise or in addition the base station may comprise a receiver for receiving from a user equipment an
30 indication of a total amount of data to be sent by that user equipment, and the calculating unit may determine the amount of data in the user equipment's data buffer based on the indication of the total amount of data,

and the amount of data already received by the base station from that user equipment.

In another aspect of the invention there is provided a
5 user equipment comprising:

a data buffer;

a unit which determines the amount of data in the data buffer;

a transmitter which transmits an indication of the
10 amount of data in the data buffer to a base station;

a receiver which receives from the base station a relative indicator, the relative indicator indicating how full the data buffer is in comparison to the data buffers of other user equipments; and

15 a scheduler which schedules uplink transmissions to the base station in dependence on the relative indicator.

In a further aspect of the invention there is provided
20 a user equipment comprising:

a data buffer;

a unit which determines an amount of data to be transmitted in a call;

a transmitter which transmits, to a base station,
25 an indication of the amount of data to be transmitted in the call, and which transmits data from the data buffer to the base station;

a receiver which receives from the base station a relative indicator, the relative indicator indicating
30 how full the data buffer is in comparison to the data buffers of other user equipments; and

a scheduler which schedules uplink transmissions to the base station in dependence on the relative indicator.

- 5 Features of one aspect of the invention may be applied to any other aspect. Any of the method features may be applied to any of the apparatus aspects and vice versa.

10 In any of the above aspects, the various features may be implemented in hardware, or as software modules running on one or more processors.

The invention also provides computer programs and computer program products for carrying out any of the methods described herein, and computer readable media
15 having stored thereon programs for carrying out any of the methods described herein. A computer program embodying the invention may be stored on a computer-readable medium, or it could, for example, be in the
20 form of a signal such as a downloadable data signal provided from an Internet web site, or it could be in any other form.

Preferred features of the present invention will now be
25 described, purely by way of example, with reference to the accompanying drawings, in which:-

Figure 1 shows parts of a wireless communications system;

30 Figure 2 shows parts of a user equipment in a first embodiment of the invention;

Figure 3 shows parts of a base station in a first embodiment of the invention;

Figure 4 shows parts of a base station in a second
35 embodiment of the invention; and

Figure 5 shows an example of the operation of an embodiment of the invention.

First embodiment

5 In the first embodiment of the invention an algorithm is implemented which enables the uplink scheduler to become in effect virtually centralised and non-distributed. This enables the UEs to make better decisions on bit rate or waiting time or format of
10 uplink transmission by having available information about the status of other source UEs in the same cell in the uplink. In this embodiment it is assumed that, as shown in Figure 1, the base station serves a number of source UEs and destination UEs, and each UE is
15 assigned a packet data buffer.

Each of the source UEs is grouped into a particular service group depending on the delay tolerance of the data that it is transmitting. The delay tolerance is a
20 measure of the maximum acceptable time for a data packet to reach its destination. For example, video services may have a low delay tolerance of, say, 100ms, while web services may have a relatively high delay tolerance.

25 During each uplink scheduling event, each source UE determines the amount of packet data existing in its buffer and waiting for transmission. Assuming the n -th source UE belongs to the j -th service group with the same delay tolerance, each source UE divides this value
30 by the maximum length of its data buffer to obtain a ratio of buffer occupancy, as follows

$$\text{Buffer_Norm_}L_n(m) = L_n(m) / L_{\max,j} \quad , \quad n=1 \dots N_j \quad (1)$$

35

where $L_n(m)$ is the amount of data in the buffer, the index m represents the current TTI or uplink scheduling event, N is the total number of source UEs, and $L_{max,j}$ is the maximum packet data buffer length which depends on the service group j . Each UE multiplies this value *Buffer_Norm_* $L_n(m)$ by 100 and takes the integer part to obtain a value referred to herein as the buffer occupancy value. Each UE then sends this value to the base station. As an alternative the real numeric value between zero and one could be sent.

The base station receives the buffer occupancy value from each UE served in the uplink. The base station is also aware of the maximum data buffer assigned to each service, and thus the base station can determine the amount of packet data is currently waiting in each source UE's buffer for transmission. The base station groups the source UEs according to their service class. It then determines the distance of the ratio sent by each source UE from the minimum ratio in each class, as follows

$$Distance_min_n(m) = Buffer_Norm_L_n(m) - Buffer_Norm_L_{min,j}(m), \quad n=1...N_j \quad (2)$$

where N_j represents the number of present UEs in class j .

To increase the homogeneous behaviour of the metric, if desired, the distance from minimum value may be subject to a secondary normalised and mathematical mapping, by dividing the distance by the sum of all the distances.

Then the base station determines the distance of the ratio sent by each UE from the average ratio in a class

of UEs. To do that the base station first determines the average received ratio as follows

$$Avg_Ratio_j(m) = \frac{1}{N_j} \sum_{i=1}^{N_j} Buffer_Norm_L_i(m) \quad (3)$$

- 5 If desired, this metric may also be subject to a secondary normalised and mathematical mapping, by dividing the average received ratio by the sum of all of the received ratios.

- 10 The distance from average is expressed as

$$Distance_Avg_n(m) = Buffer_Norm_L_n(m) - Avg_Ratio_j(m), n=1...N_j \quad (4)$$

- The base station converts the distance from minimum value and the distance from average value to two
15 information bytes and sends them back to the source UEs in the current uplink scheduling event.

- Each source UE thus receives two values from the base station, one indicating how full its buffer is in
20 comparison to the least full buffer (distance from minimum), and one indication how full its buffer is in comparison to the average (distance from average). The UE combines these two relative values with its knowledge about the exact amount of packet data in its
25 buffer and with its own knowledge on radio channel condition in terms of SINR (signal to noise and interference ratio) to produce a final metric, as follows.

- 30 $Final_Metric_k(m) = COMBI(Distance_Avg_k(m), Distance_min_k(m), Ch_k(m)) \quad (5)$

where $Ch_k(m)$ is the knowledge about the quality of the channel in the uplink between the k th source UE and the

base station, and *COMBI* is a function that combines this metric with the distance from average and the distance from minimum.

- 5 The UE uses its final metric to determine the rate and/or times at which it transmits its data packets. In general, UEs with a high final metric, indicating a higher buffer occupancy in comparison to other UEs, transmit at a higher rate. In this way the various UEs
10 can be brought into a situation where they have similar levels of buffer occupancy. Further details of the scheduling mechanism are given later.

User equipment

- 15 Figure 2 shows parts of a user equipment in an embodiment of the invention. Referring to Figure 2, buffer 10 receives data packets which are to be transmitted and stores them on a first-in-first-out basis. Packets for transmission are output from the
20 buffer 10 under control of scheduler 12.

- A signal indicating the number of packets currently stored is output from the buffer 10 to buffer occupancy value calculation unit 14. This unit divides the
25 number of stored packets by the maximum length of the buffer to yield the ratio of stored packets to maximum buffer length, in accordance with equation (1) above. The unit 14 then multiplies this value by 100 and takes the integer part to give a value between 1 and 100,
30 referred to herein as the buffer occupancy value.

- The buffer occupancy value calculated by unit 14 is output to multiplexer 16. The multiplexer 16 inserts the value into a control channel which is to be
35 transmitted in the uplink to the base station. Packets output from the buffer 10 are inserted into a data

channel. The combined signal is then given a
channelisation code by spreader 18, and transmitted to
the base station by means of transmitter 20, duplexer
22 and antenna 24. Where the user equipment has two or
5 more active base stations, an appropriate
channelisation code is used for each base station.

Signals from the base station are received by receiver
26 via antenna 24 and duplexer 22. Signals intended
10 for that particular user equipment are separated from
other signals by despreader 28. The output of
despreader 28 is a control channel containing control
information for, amongst other things, power control.
In this embodiment the control channel also contains
15 the distance from average and distance from minimum
values transmitted by the base station.

Channel quality indicator 30 estimates the quality of
the channel between the user equipment and the base
20 station. Any suitable measure of quality can be
produced; for example, a received signal strength (RSS)
or power measure, a bit error rate (BER) or a frame
error rate (FER) measure, or a signal-to-interference
ratio (SIR) or a signal-to-interference-and-noise ratio
25 (SINR) measure could be produced. The measure could be
based on a pilot signal broadcast by the base station.
For example, the strength of the pilot signal could be
taken as a measure of signal quality, or the base
station may also broadcast the transmit power ratio of
30 a data channel to the pilot channel, and this ratio
could be used in conjunction with the pilot signal
strength to obtain a measure of signal quality.
Alternatively the measure could be derived from
transmission power control (TCP) information (such as a
35 power up/power down instruction) generated in the user
equipment for downlink power control purposes. Any of

the measures could be based on a history or average of measurements taken over several measurement periods. Two or more measures could be combined, if desired. The output of channel quality indicator 30 is fed to
5 final metric calculation unit 32.

Demultiplexer 34 separates the distance from average and distance from minimum values from the control channel, and passes these values to final metric
10 calculation unit 32. Final metric calculation unit 32 combines the distance from average value, the distance from minimum value, the channel quality value and the number of stored packets value (output from buffer 10) to yield a final metric, in accordance with equation
15 (5) above. The final metric is output to scheduler 12 for use in scheduling uplink data packet transmissions.

The above reporting processes are repeated at appropriate intervals. For example, the buffer
20 occupancy value may be calculated in the UE and transmitted to the base station every Time Transmission Interval (TTI). Similarly the distance from average values and the distance from minimum values may be calculated in the base station and transmitted to the
25 source UEs every TTI. Any of these processes may also be carried out every two or more TTIs where appropriate. For example, when the uplink channel resources are fully utilised, or nearly fully utilised, it may be desirable to reduce the amount of data which
30 is transmitted for the purposes of scheduling. In this case the reporting processes may only take place every few TTIs. The intervals at which the reporting processes take place may be varied, for example, depending on traffic conditions in the cell or sector.

35

Base station

Figure 3 shows parts of a base station in an embodiment of the invention. Referring to Figure 3, the signals from source user equipments are received by receiver 44
5 via antenna 40 and duplexer 42. The received signals are passed to a plurality of despreaders 46. Each of the despreaders uses the channelisation code employed in one of the uplink channels from the source UEs to the base station in order to separate the data packets
10 transmitted by that source UE. In this way, the data packets from the various source UEs are separated into separate signals.

The outputs of each one of the despreaders 46 is input
15 to one of a plurality of demultiplexers 48. Each of the demultiplexers separates out the buffer occupancy value from the control channel which is transmitted by the corresponding UE. The data packets for onward transmission to the destination UEs are output to
20 buffers 50, one buffer being provided for each destination UE.

The buffer occupancy values output from the demultiplexers 48 are fed to distance from average
25 calculation units 52 and distance from minimum calculation units 54. Each of the distance from average calculation units 52 calculates the distance of the buffer occupancy value of one of the source UEs from the average buffer occupancy value in that class,
30 in accordance with equations (3) and (4) above. Each of the distance from minimum calculation units 54 calculates the distance of the buffer occupancy value of one of the source UEs from the minimum buffer occupancy value in that class, in accordance with
35 equation (2) above. The outputs of distance from average calculation units 52 and distance from minimum

calculation units 54 are therefore the distance from average values and the distance from minimum values respectively for each source UE.

5 The distance from average values and the distance from minimum values are fed to multiplexers 56. Each of the multiplexers 56 multiplexes the distance from average value and the distance from minimum value for one of the source UEs into a control channel that is to be
10 transmitted to that UE. The various control channels are then given channelisation codes by spreaders 58 and transmitted to the source UEs by means of transmitter 60, duplexer 42 and antenna 40.

15 **Scheduling algorithm**

In the present embodiment two different uplink scheduling mechanisms are used, depending on the overall status of the communications system. The first mechanism is a hybrid rate-time scheduling mechanism.
20 In this mechanism, unlike pure time scheduling, one UE does not occupy all of the uplink resources at any one time. On the other hand, unlike pure rate scheduling, not all of the UEs are transmitting all of the time. Instead, each UE is able to vary the rate and the
25 intervals at which it transmits.

In the hybrid rate-time scheduler, each UE has an active mode within which it is allowed by the uplink scheduling functionality to transmit. The UE can also
30 adjust the rate at which it transmits when in the active mode. This transmission period may be, for example, one TTI, or one downlink scheduling event. Each UE also has a silent mode in which it does not transmit. The UE may experience alternate active
35 periods and silent periods. In this way the UE

effectively combines rate scheduling and time scheduling.

5 In some circumstances the delay which results from time scheduling in the hybrid rate-time scheduler can not be tolerated by the power control mechanism. Therefore the second scheduling mechanism which may be used is a rate scheduling mechanism which avoids the silent transmission periods which are experienced in the
10 hybrid rate-time scheduler. In the second scheduling mechanism the silent time is zero, and therefore all of the source UEs transmit at the same time, in a similar way to WCDMA rate scheduling. However, each UE may vary its rate of transmission.

15 In both rate scheduling and hybrid rate-time scheduling, the rate of transmission may be varied by adjusting the Modulation and Coding Scheme (MCS) level. The MCS level is decided by the UE based on the final
20 metric which it has calculated. This may be done, for example, by consulting a look-up table which includes the appropriate MCS levels for each value of the final metric.

25 In the hybrid rate-time scheduler, in order to decide when to transmit, each UE makes use of an assigned maximum acceptable waiting time or sleeping time. This is a value which is assigned to the UE depending on the type of service, and gives the maximum time which it is
30 acceptable for a data packet to wait at the UE before being transmitted. Each UE then determines an actual waiting time for its data packets based on the maximum waiting time and the final metric. By adjusting the actual waiting time of the data packets, the UE in
35 effect adjusts its data transmission rate.

When a UE receives a high distance from minimum value and a high distance from average value, it knows that it has a relatively large amount of data to transmit. The UE is also aware of the actual amount of data which it has in its buffer waiting to be transmitted. If the actual amount of data which the UE has to deliver is also high, then the UE will switch to a high data rate for a certain amount of time, such as a few TTIs or uplink scheduling events. Where the actual amount of data to transmit is not so great the data rate may be set accordingly, to avoid transmitting at high powers for short amounts of time.

Similarly, when a UE receives a low distance from minimum value and a low distance from average value, it knows that the amount of data in its buffer is well below average. In this case the UE will reduce its transmission rate. The result is a balancing of the UE buffer lengths: UEs with a large amount of data waiting to transmit will have the chance to catch up with other UEs and to reduce their buffer occupancy to lower levels which are closer to average. In this way controllable fairness is introduced into the uplink packet scheduling.

The radio conditions in the uplink can also be used to influence the decision making process. For example, if radio conditions are good and a UE has a large amount of data to transmit, then that UE may transmit at a higher rate than if the radio conditions were not so good. If the radio conditions are poor, then, even if the UE has a large amount of data to transmit, it may have to accept a lower transmission rate to avoid degrading the uplink channel for relatively little gain. If the radio channel conditions are superb, a UE having a fairly low buffer occupancy might still

increase its transmission rate somewhat. In this way the need for fairness is balanced with the need for high overall throughput.

5 The distance from minimum and distance from average values can also be used to override an assigned minimum buffer threshold. In general, if the amount of data a UE's data buffer is below the threshold, then the UE will not transmit. However, this condition may be
10 overridden where a UE determines that it has more data to transmit than the other UEs. Thus, if the UE's buffer is below the threshold, but the other UEs also have little data to transmit, the first UE can still transmit and thus avoid unnecessary delay and under-
15 utilisation of radio resources.

Second embodiment

In the first embodiment of the invention a buffer occupancy value is sent from each source user equipment
20 to the base station every scheduling event, which may be every TTI, or every few TTIs. However, in some circumstances even reporting every few TTI may be undesirable because of the channel resources which are occupied. Thus, in a second embodiment of the
25 invention, rather than transmit the buffer occupancy values to the base station at every scheduling event, the base station estimates the buffer occupancy values based on information transmitted to it at the beginning of a call, together with its own knowledge of how many
30 packets it has received from a particular UE.

In this embodiment it is assumed that each UE is capable of determining the amount of packet data to be sent at the beginning of packet call. Each UE then
35 sends this value to the base station. As communication proceeds further, the base station estimates the amount

of data remaining in each UE buffer based on these received values, and the number of packets that have been received from each UE. The estimated values thus obtained are then used to determine distance from
5 average values and distance from minimum values, as in the first embodiment.

In the second embodiment the distance from average and distance from minimum values are transmitted to the UEs
10 for use in uplink scheduling in the same way as in the first embodiment. Thus this reporting process still requires transmission to be made from the base station to the user equipments on a regular basis. However, since the present embodiments are concerned with uplink
15 scheduling, i.e. situations in which data is being sent from the user equipments to the base station, the extra transmissions in the downlink for the reporting process are unlikely to be problematic.

20 A user equipment in the second embodiment is similar to that shown in Figure 2 except that, instead of buffer occupancy calculation unit 14, a total number of packets indicator is provided which inserts into the control channel at the start of a packet call the total
25 number of packets in that call.

Figure 4 shows parts of a base station in the second embodiment. Those parts which are the same as in the base station shown in Figure 3 are given the same
30 reference numerals and are not described further. Referring to Figure 4, each of the demultiplexers 62 separates out the total number of packets value which is transmitted by one of the source UEs at the start of a packet call. These values are stored in call length
35 indicators 64. The data packets for onward transmission to the destination UEs are output to

buffers 66, one buffer being provided for each destination UE.

For each scheduling event, the number of packets
5 received from each UE in the current packet call is
output from the buffers 66 to number of packets
received indicators 68. The total number of packets
values from unit 64, and the number of packets received
values from unit 68, are output to buffer occupancy
10 estimation units 70. Each of these units estimates the
buffer occupancy for one of the source UEs. This may
be done, for example, by subtracting the number of
packets received from the total number of packets for
that UE. If desired, account could also be taken of
15 the rate at which the UE buffer is expected to be
filled.

The outputs of the buffer occupancy estimation units 70
are estimated buffer occupancy values for each of the
20 source UEs. These values are fed to distance from
average calculation units 72 and distance from minimum
calculation units 74. These units calculate the
distance from average and the distance from minimum
values for each class, in a similar way to units 52 and
25 54 described above with reference to Figure 3. The
outputs of distance from average calculation units 72
and distance from minimum calculation units 74 are
therefore estimated distance from average values and
estimated distance from minimum values respectively for
30 each source UE.

The thus calculated distance from average values and
the distance from minimum values are fed to
multiplexers 56 where they are multiplexed into a
35 control channel that is to be transmitted to that UE.
The various control channels are then transmitted to

the source UEs in the same way as described above with reference to Figure 3.

If desired, a combination of the first embodiment and the second embodiment could be used. For example, some source UEs could report their buffer occupancies at regular intervals using the first embodiment, while other source UEs could have their buffer occupancies estimated at the base station using the second embodiment. Each UE may switch from one technique to the other, for example, depending on channel conditions.

Examples

An example of the operation of an embodiment of the invention will now be described with reference to Figure 5. In Figure 5 a situation is shown in which four source UEs A, B, C and D try to reach their corresponding destination UEs A, B, C and D through the base station. It is assumed that all the UEs experience similar radio channel conditions and SINR (signal to noise and interference ratio). They support streaming real-time service with similar delay tolerances. In Figure 5, C1 is the distance from average value and C2 is the distance from minimum value. It can be seen that UE A has received C1=49 which means the amount of data in its buffer is well above the average amount of ratios of all UEs. It also receives a C2=75 meaning that it is far away from the UE with minimum buffer data. Looking at its buffer this source UE realizes that its packet data buffer is almost full and it needs to transmit faster to empty its buffer to come down to reach average data levels. Among other UEs, UE D has received the poorest distance from average and distance from minimum values. This UE will then have the slowest transmission rate because it

assumes that it has already transmitted successfully enough and currently does not have much data for transmission. Therefore its buffer will start to grow to reach average level.

5

Thus embodiments of the present invention make each source UE aware of its situation compared to other source UEs in its cell or sector, in terms of packet data congestion and the amount of existing competition
10 for radio channels. In making a decision about the transmission time (waiting time for other UEs) and transmission rate, the UE not only has an idea about its radio channel and how full its buffer is, but also it has an idea about the overall situation with other
15 UEs. The UE is therefore able to make more efficient decisions. Significantly better QoS, better throughput and lower packet delivery delays are expected as a consequence.

20 The various embodiments which have been described above may be implemented using software modules running on a processor, for example a digital signal processor, or any other type of processor. The programming of such modules will be apparent to the skilled person from the
25 description of the various functions. The skilled person will appreciate that such modules may be programmed on any appropriate processor using any appropriate programming language. Alternatively, some or all of the functions described above may be
30 implemented using dedicated hardware.

It will be understood that the present invention has been described above purely by way of example, and modifications of detail can be made within the scope of
35 the invention. For example, the instead of transmitting the distance from average values and the

distance from minimum values for the base station to each user equipment, the base station may transmit signals indicating to each base station when and/or at what rate to transmit. The invention may be used with

5 multiplexing techniques other than CDMA, such as time division multiple access (TDMA), frequency division multiplexing (FDM), hybrid TDMA/CDMA, or any other appropriate multiplexing technique.

10

CLAIMS

1. A method of scheduling uplink transmissions from a plurality of source user equipments to a base station, the method comprising the steps of:
- 5 determining the amount of data in the data buffer of each of the user equipments;
- comparing the amount of data in the data buffers of the user equipments to obtain, for each user
- 10 equipment, a relative indicator, the relative indicator indicating how full that user equipment's data buffer is in comparison to the data buffers of the other user equipments; and
- scheduling uplink transmissions in dependence on
- 15 the relative indicators.
2. A method according to claim 1, wherein a plurality of relative indicators are determined for each user equipment.
- 20
3. A method according to claim 1 or 2, wherein the or at least one of the relative indicators is an indication of how full a user equipment's buffer is in comparison to the average.
- 25
4. A method according to any of the preceding claims, wherein the or at least one of the relative indicators is an indication of how full a user equipment's buffer is in comparison to the minimum.
- 30
5. A method according to any of the preceding claims, wherein the comparing step is carried out by the base station.
- 35
6. A method according to claim 5, further comprising the step of transmitting the or each

relative indicator for each user equipment from the base station to that user equipment.

7. A method according to any of the preceding
5 claims, wherein a user equipment determines an amount of data in its data buffer and transmits an indication of the amount of data to the base station.

8. A method according to any of the preceding
10 claims, wherein a user equipment sends to the base station an indication of the total amount of data to be sent, and the base station determines the amount of data in the user equipment's data buffer based on the indication of the total amount of data, and the amount
15 of data already received by the base station from that user equipment.

9. A method according to any of the preceding claims, wherein each user equipment determines a rate
20 and/or time at which it transmits data to the base station based on the or each relative indicator for that user equipment.

10. A method according to claim 9, wherein a user
25 equipment which receives an relative indicator indicating that it has a relatively full buffer transmits data to the base station at a higher rate than would otherwise be the case.

30 11. A method according to claim 9 or 10, wherein a user equipment which receives a relative indicator indicating that it has a relatively empty buffer transmits data to the base station at a lower rate than would otherwise be the case.

35

12. A method according to any of claims 9 to 11, wherein the user equipment determines the time and/or rate at which it transmits data based additionally on a measurement of radio channel conditions.

5

13. A method according to any of claims 9 to 12, wherein the user equipment determines the time and/or rate of packet transmission based additionally on the actual amount of data in its data buffer.

10

14. A method according to any of claims 9 to 13, wherein the user equipment determines the time and/or rate of packet transmission based additionally on the type of service.

15

15. A method according to any of the preceding claims, wherein a user equipment which receives a relative indicator indicating that it has more data to transmit than other user equipments transmits data to the base station even if the amount of data in its data buffer is below a minimum buffer threshold.

20

16. A method according to any of the preceding claims, wherein uplink transmissions are scheduled using rate scheduling.

25

17. A method according to any of the preceding claims, wherein uplink transmissions are scheduled using hybrid rate-time scheduling.

30

18. A method according to any of the preceding claims, wherein the rate of uplink transmission is varied by adjusting the modulation and coding scheme level.

35

19. A method according to any of the preceding claims, wherein the rate of uplink transmission is varied by adjusting the intervals at which the uplink transmissions take place.

5

20. A base station for receiving data transmissions from a plurality of user equipments, the base station comprising:

means for determining the amount of data in a data
10 buffer of each of the user equipments;

means for comparing the amount of data in the data buffers of the user equipments to obtain, for each user equipment, a relative indicator, the relative indicator indicating how full that user equipment's data buffer
15 is in comparison to the data buffers of the other user equipments; and

means for transmitting the relative indicator for each user equipment from the base station to that user equipment.

20

21. A base station according to claim 20, wherein the determining means is arranged to determine, for each user equipment, an indication of how full that user equipment's buffer is in comparison to the
25 average.

22. A base station according to claim 20 or 21, wherein the determining means is arranged to determine, for each user equipment, an indication of how full that
30 user equipment's buffer is in comparison to the minimum.

23. A base station according to any of claims 20 to 22, wherein the base station comprises means for

receiving from a user equipment an indication of the amount of data that that user equipment has in its data buffer.

5 24. A base station according to any of claims 20 to 23, wherein the base station further comprises:

means for receiving from a user equipment an indication of a total amount of data to be sent by that user equipment; and

10 means for determining the amount of data in the user equipment's data buffer based on the indication of the total amount of data, and the amount of data already received by the base station from that user equipment.

15

25. A user equipment comprising:

a data buffer;

20 means for transmitting to a base station information concerning an amount of data to be transmitted;

means for receiving from a base station a relative indicator, the relative indicator indicating how full the data buffer is in comparison to the data buffers of other user equipments served by that base station; and

25 means for scheduling uplink transmissions to the base station in dependence on the relative indicator.

26. A user equipment according to claim 25, further comprising means for determining the amount of data in the data buffer, wherein the transmitting means is arranged to transmit an indication of the amount of data in the data buffer to a base station.

30

27. A user equipment comprising according to claim 25 or 26, further comprising means for determining an amount of data to be transmitted in a call, wherein the transmitting means is arranged to
5 transmit an indication of the amount of data to be transmitted in the call.

28. A user equipment according to any of claims 25 to 27, wherein the scheduling means is arranged to
10 determine a rate and/or time at which data is to be transmitted to the base station based on the relative indicator.

29. A user equipment according to claim 28,
15 wherein the scheduling means is arranged such that data is transmitted to the base station at a higher rate than would otherwise be the case when the user equipment receives a relative indicator indicating that it has a relatively full buffer.

20

30. A user equipment according to claim 28 or 29, wherein the scheduling means is arranged such that data is transmitted to the base station at a lower rate than would otherwise be the case when the user equipment
25 receives a relative indicator indicating that it has a relatively empty buffer.

31. A user equipment according to any of claims 28 to 30, further comprising means for determining a
30 measurement of radio channel conditions, wherein the scheduling means is arranged to determine the time and/or rate at which data is transmitted based additionally on a measurement of radio channel conditions.

35

32. A user equipment according to any of claims 28 to 31, wherein the scheduling means is arranged to determine the time and/or rate of data transmission based additionally on the type of service.

5

33. A user equipment according to any of claims 28 to 32, wherein the scheduling means is arranged to determine the time and/or rate of data transmission based additionally on the or a amount of data which is determined to be in its data buffer.


10

34. A user equipment according to any of claims 25 to 33, wherein the scheduling means is arranged such that data is transmitted even when the amount of data in the data buffer is below a minimum buffer threshold, when the user equipment receives a relative indicator indicating that it has more data to transmit than other user equipments.

15

20

1/5

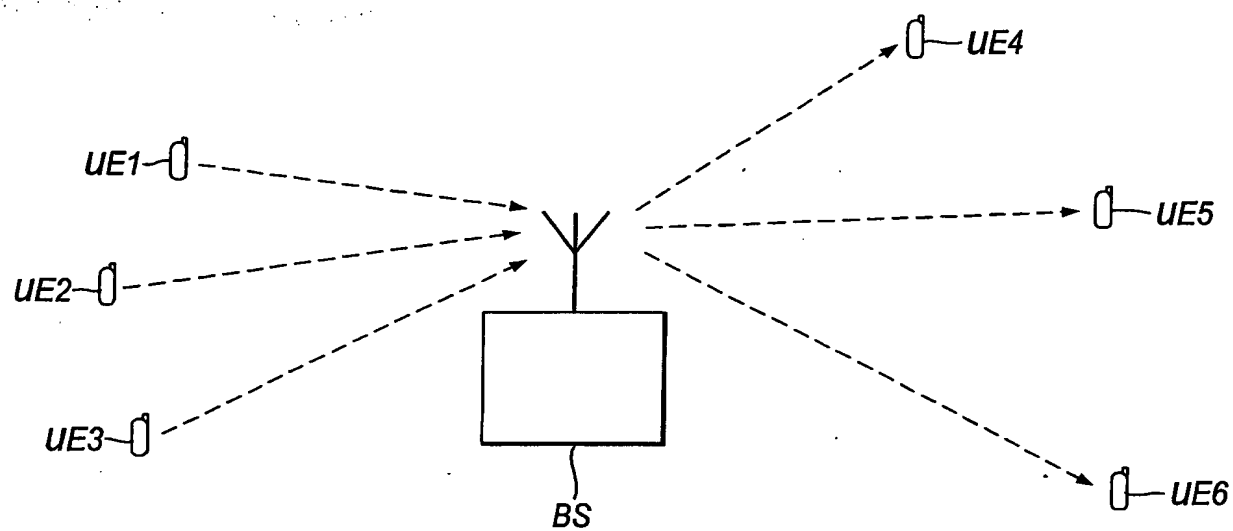*Fig.1*

THIS PAGE LEFT BLANK

2/5

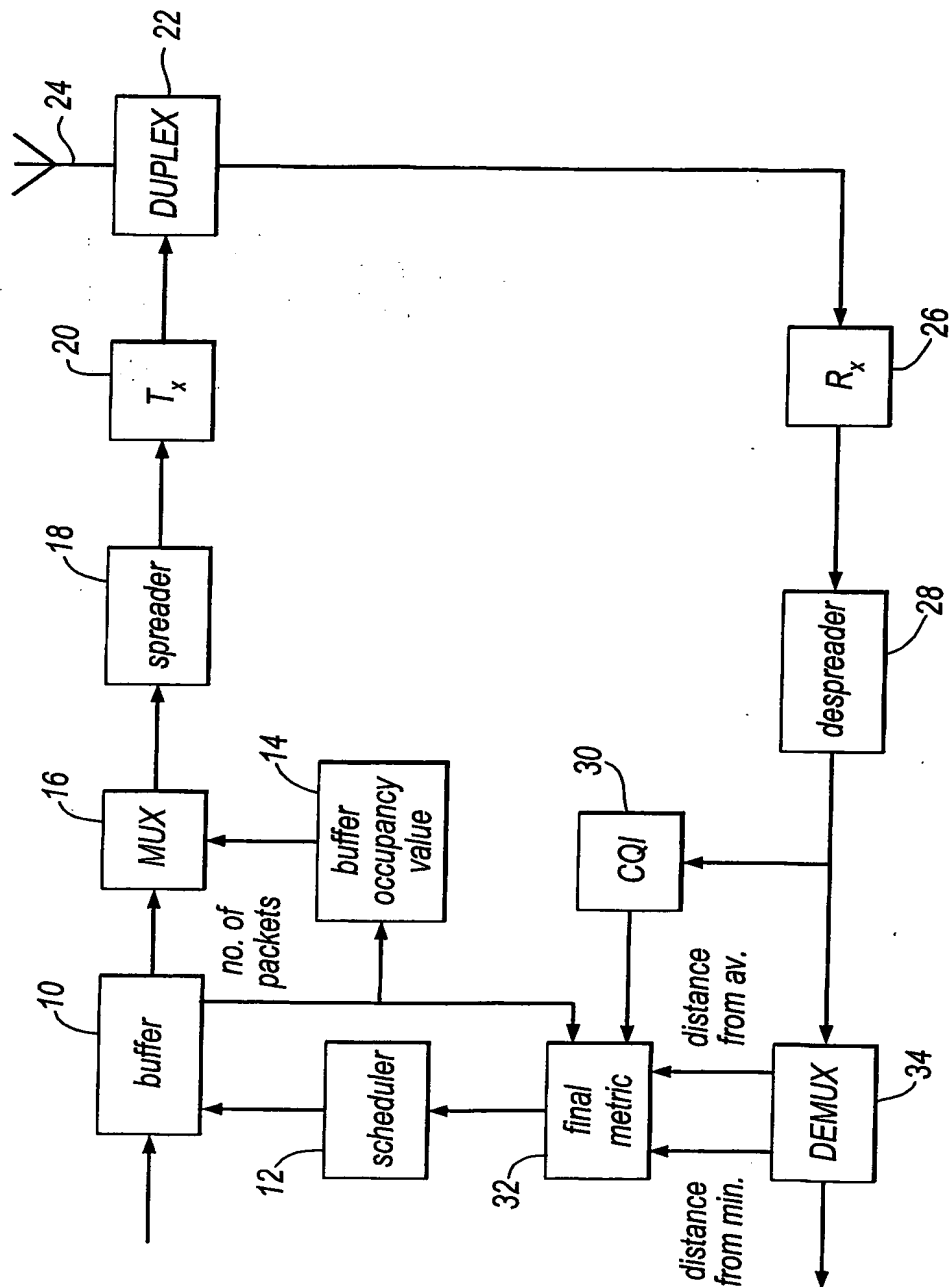


Fig.2

THIS PAGE LEFT BLANK

3/5

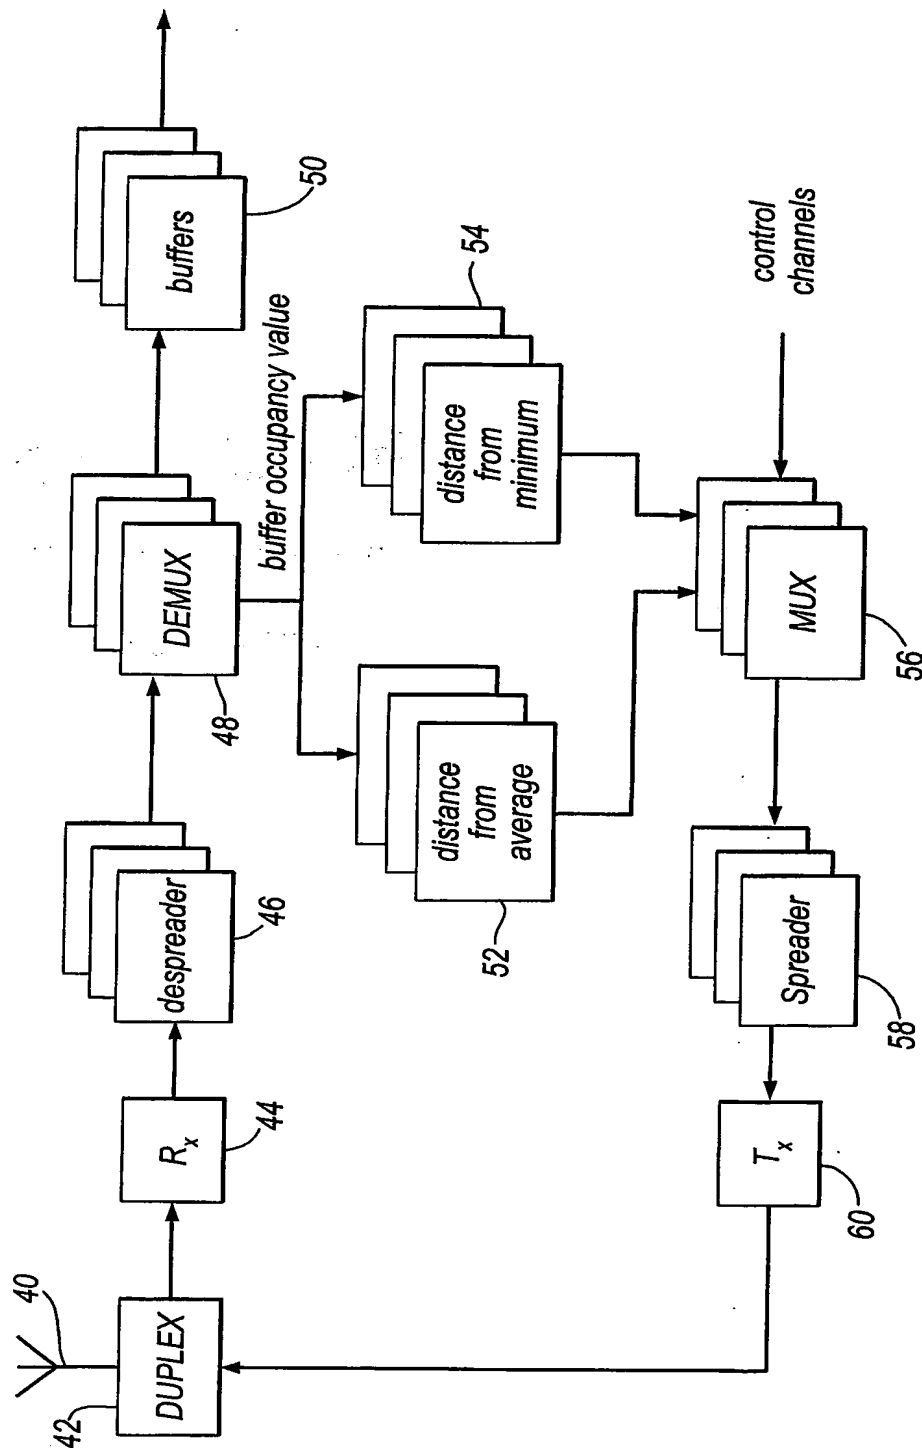


Fig.3

THIS PAGE LEFT BLANK

4/5

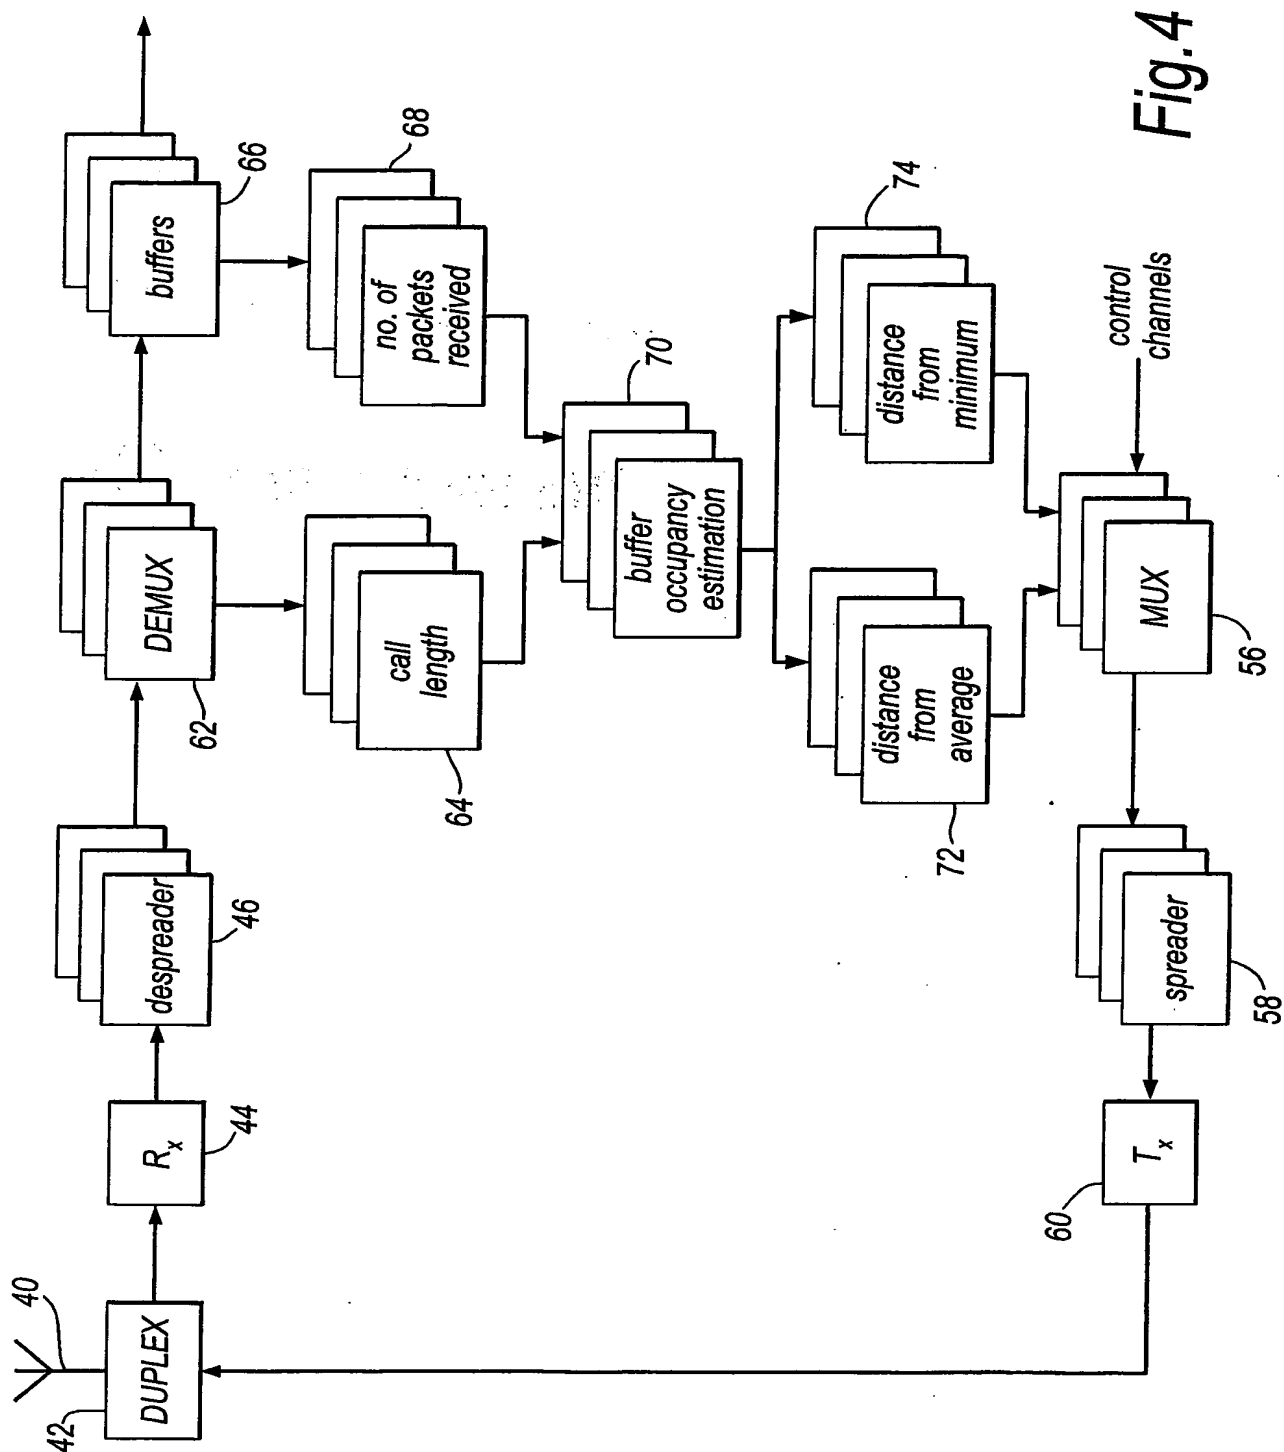


Fig. 4

THIS PAGE LEFT BLANK

5/5

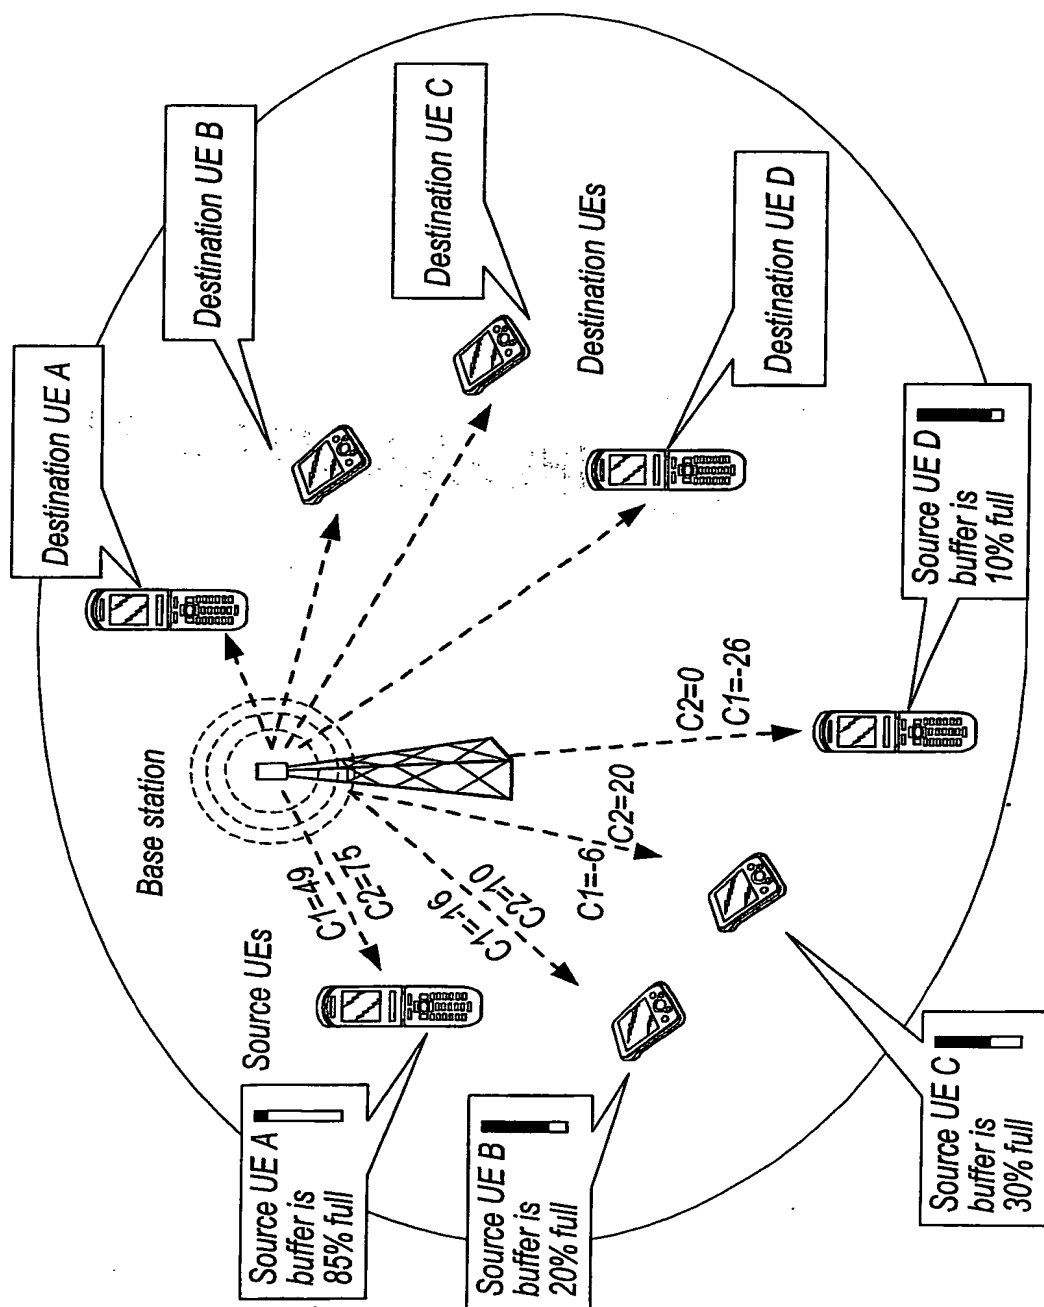


Fig.5

THIS PAGE LEFT BLANK

INTERNATIONAL SEARCH REPORT

National Application No
PCT/GB2004/004209

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L12/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	<p>EP 1 130 872 A (LUCENT TECHNOLOGIES INC) 5 September 2001 (2001-09-05) abstract page 2, line 38 - page 3, line 22 page 3, lines 42-52 page 4, lines 10-21 page 4, lines 27,28 page 4, lines 32-34 page 5, lines 46-48 claims 1,3</p> <p style="text-align: center;">----- -/-</p>	<p>1,2,5,7 3,4</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

17 December 2004

Date of mailing of the international search report

08. 03. 2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Dejonghe, O

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB2004/004209

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02/39760 A (NOKIA CORP ; CLANTON CHRIS (US); KAKANI NAVEEN (US); HUOVINEN LASSE (U) 16 May 2002 (2002-05-16)	1,2,5,7
A	abstract page 3, lines 8-23 page 4, lines 15-17 page 5, line 1 - page 8, line 19 claims figures 1-3	3,4
A	----- US 2001/055972 A1 (SAKATA MASAYUKI) 27 December 2001 (2001-12-27) the whole document	1-5,7
A	----- US 2002/142780 A1 (AIRY MANISH ET AL) 3 October 2002 (2002-10-03) the whole document	1-5,7
A	----- US 2002/061007 A1 (PANKAJ RAJESH K) 23 May 2002 (2002-05-23) the whole document -----	1-5,7

INTERNATIONAL SEARCH REPORT

national application No.
PCT/GB2004/004209

Box II Observations where certain claims were found unsearchable (Continuation of Item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of Item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-5, 7

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-5,7

Calculation of the relative indicator indicating how full a buffer of a user equipment is with respect to other user equipments

2. claims: 6,9-15,20-34

Method of scheduling of uplink transmissions where decision to transmit is decentralized at user equipment level

3. claim: 8

Estimation at the base station of the amount of data in the user equipment buffer

4. claims: 16-19

Adaptation of the transmission rate at the user equipment

INTERNATIONAL SEARCH REPORT

ional Application No
PCT/GB2004/004209

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1130872	A	05-09-2001	US 6590890 B1	08-07-2003
			EP 1130872 A1	05-09-2001
			JP 2001274839 A	05-10-2001

WO 0239760	A	16-05-2002	US 2002093953 A1	18-07-2002
			AU 9306901 A	21-05-2002
			CA 2428061 A1	16-05-2002
			CN 1484928 A	24-03-2004
			EP 1332640 A2	06-08-2003
			JP 2004533731 T	04-11-2004
			WO 0239760 A2	16-05-2002

US 2001055972	A1	27-12-2001	JP 2001359153 A	26-12-2001

US 2002142780	A1	03-10-2002	NONE	

US 2002061007	A1	23-05-2002	US 6393012 B1	21-05-2002
			US 6229795 B1	08-05-2001
			US 2004013089 A1	22-01-2004
			US 2003198204 A1	23-10-2003
			AT 273602 T	15-08-2004
			AU 2772901 A	24-07-2001
			BR 0107462 A	12-08-2003
			CN 1408193 A	02-04-2003
			DE 60104812 D1	16-09-2004
			EP 1245127 A1	02-10-2002
			EP 1475987 A1	10-11-2004
			JP 2003520523 T	02-07-2003
			TW 507462 B	21-10-2002
			WO 0152588 A1	19-07-2001
			AU 2965300 A	01-08-2000
			BR 0007510 A	08-01-2002
			CN 1337111 A	20-02-2002
			EP 1145501 A2	17-10-2001
			JP 2002534941 T	15-10-2002
			WO 0041542 A2	20-07-2000
			US 2001006508 A1	05-07-2001

THIS PAGE LEFT BLANK